


## Cement Engineering Board

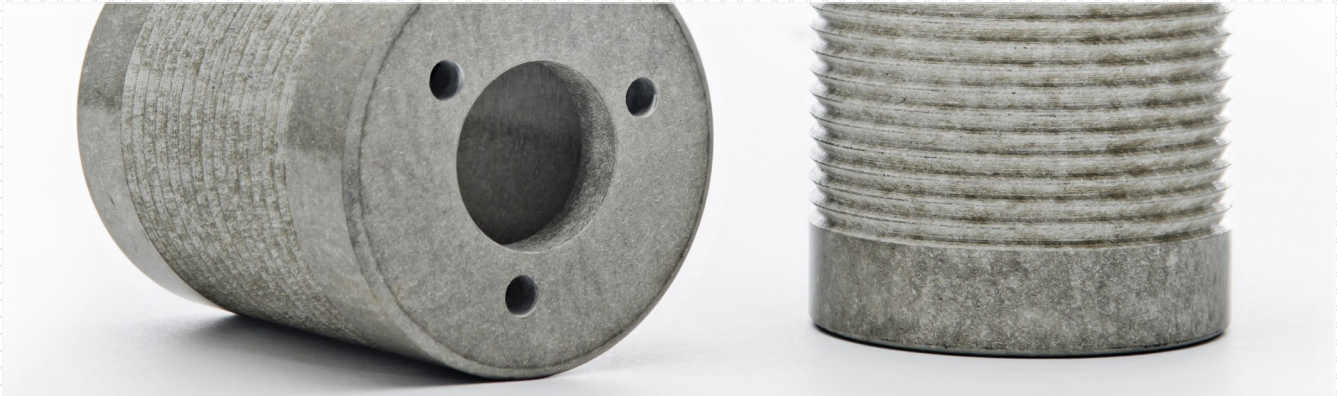

**TENMAT** SINDANYO H91 has been specially developed to provide outstanding service in demanding thermal applications, where a quality, high strength, machineable engineering board is required.

**TENMAT** SINDANYO H91 exhibits excellent strength even at high temperatures reaching up to 700°C. This, alongside it being asbestos-free,

has underlined H91's position as the leading engineering cement available.

**TENMAT** SINDANYO is available in sheets of approx. dimensions 1245 x 940 mm with thickness between 6 and 75 mm. Alternatively, **TENMAT** SINDANYO machined components are available on request.

PROPERTY	UNITS	TYPICAL VALUE
Density	g / cm <sup>3</sup>	1.61
Compressive Strength	MPa @ ambient	90
	24 hours @ 350 °C	38
	24 hours @ 500 °C	31
	24 hours @ 700 °C	29
Flexural Strength	MPa @ ambient	30
	24 hours @ 350 °C	16
	24 hours @ 500 °C	13
	24 hours @ 700 °C	13
Impact Strength	Kj/mm @ ambient	4
	24 hours @ 350 °C	2.4
	24 hours @ 500 °C	2.4
	24 hours @ 700 °C	2.4
Linear Shrinkage in 24hrs	% @ 350 °C	0.36
Water Absorption	% in 24 hours @ 23 °C	17
Electric Strength @ 90 °C	KV/mm in air	2.1
Surface Breakdown @ 90 °C	KV in air	15
Maximum Continuous Operating Temperature	°C	700

The information contained in this data sheet is presented in good faith. They are typical test results tested generally in accordance with BS, ISO and ASTM test methods and should not be used for specifications. **TENMAT** does not warrant the conformity of its materials to the listed properties or their suitability for any particular purpose.

For further information please contact our Technical Sales Department on +44 161 872 2181.